
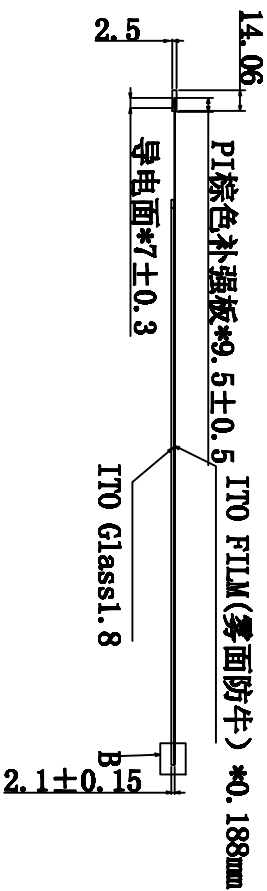


PIN	PIN1	PIN2	PIN3	PIN4
OUT	X1	Y1	X2	Y2

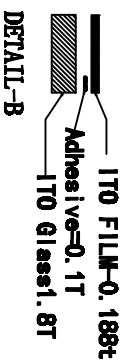

- Instruction:
1. Type: Film to Glass
  2. Operating Voltage: 5~7 V
  3. Response Time: <math>\le 10\text{ms}</math>
  4. Storage Temperature:  $-20\text{ }^{\circ}\text{C} \sim 70\text{ }^{\circ}\text{C}$
  5. Operation Temperature/Humidity:  $-10\text{ }^{\circ}\text{C} \sim 60\text{ }^{\circ}\text{C} / 20\% \sim 90\% \text{RH}$
  6. Withstanding Life:  $>10,000,000$  Times, 250gf Force;
  7. Writting Life:  $>1,000,000$  Times 250gf Force;
  8. Donor Material: PPO+PIH

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm  $\ge 70\%$
11. Light transmission:  $\ge 70\%$
12. Force: 100g or Less
13. Linearity:  $\le 1.5\%$
14. Insulation:  $\ge 20\text{M } \Omega$
15. Surface Bandwidth:  $\ge 30$  (open: 11)
16. 未标注公差为  $\pm 0.3\text{mm}$

MODEL NO.	TS133A4K03	UNIT:	mm
DRAWN:		TOLERANCE:	$\pm 0.3$
DATE:	16/11/14	SCALE:	1:1
VERSION:	1.0	REV:	