


由 Autodesk 教育版产品制作

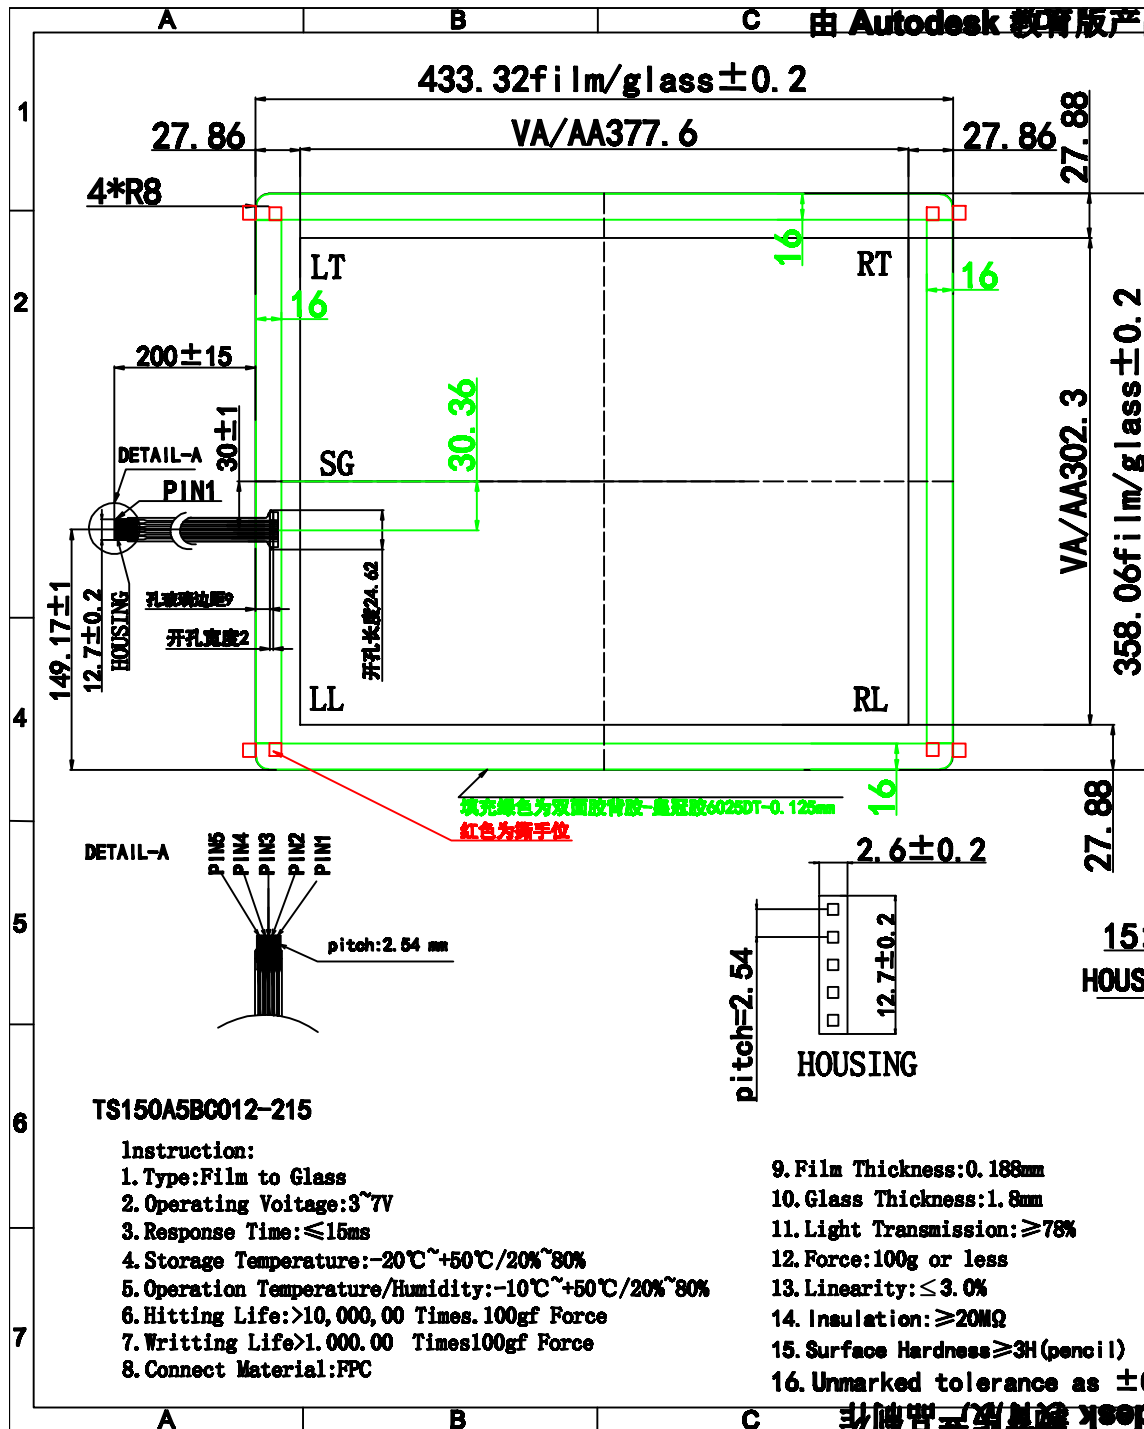


由 Autodesk 教育版产品制作





E	F	G
(mark)	(revised contents)	(signature) (Date)
1		

Contact Side:

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	RT
2	LT
3	SG
4	LL
5	RL

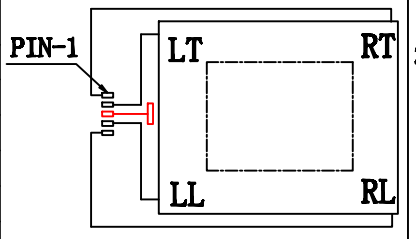

DETAIL-B

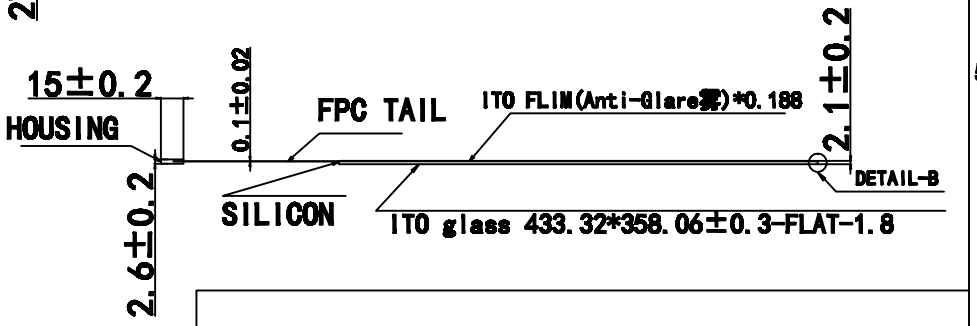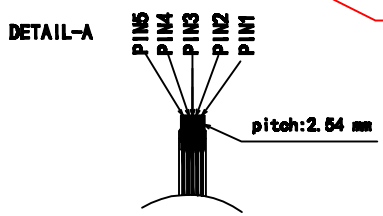

TS150A5BC012-215

Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7V
3. Response Time: ≤ 15ms
4. Storage Temperature: -20°C ~ +50°C / 20% ~ 80%
5. Operation Temperature/Humidity: -10°C ~ +50°C / 20% ~ 80%
6. Hitting Life: > 10,000,00 Times. 100gf Force
7. Writting Life: > 1,000,00 Times. 100gf Force
8. Connect Material: FPC

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light Transmission: ≥ 75%
12. Force: 100g or less
13. Linearity: ≤ 3.0%
14. Insulation: ≥ 20MΩ
15. Surface Hardness: ≥ 3H (pencil)
16. Unmarked tolerance as ± 0.5

TITLE:	TS190A5BC004			
Designed By:	Customerid:	View:		
Checked By:	Unit:	mm		
Approved By:	Date:	2019-05-27	Scale:	1:1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作